





Alps socket screws

Hexagon Socket Pipe Plugs 六角穴付きプラグ

■六角穴付きプラグ油圧用

LONG SIZE : SP 2
SHORT SIZE : SP 4

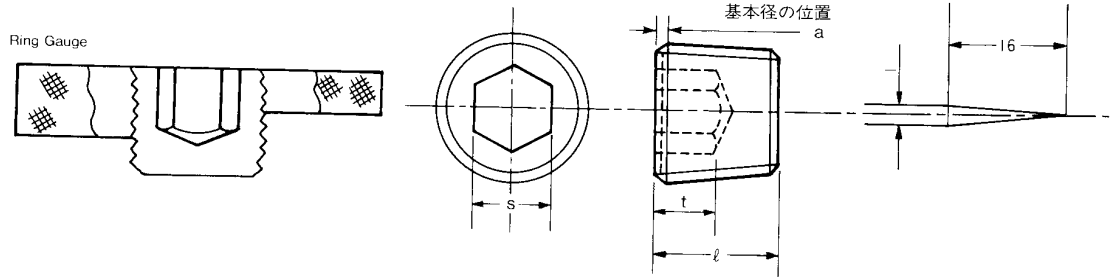

(単位mm)

サイズと ねじ山	ねじ基準径			基準径の位置		二面幅		穴深さ	SP2プラグの長さ		SP4プラグの長さ	
	外径	有効径	谷径	aの長さ	許容差	s	許容差	t(最小)	ℓ	許容差	ℓ	許容差
R1/8 28	9.728	9.147	8.566	0.45	+1.1 0	5	+0.10 +0.03	3	8	±0.4	7	±0.4
R1/4 19	13.157	12.301	11.445	0.7	+1.5 0	6	+0.10 +0.03	4.4	11	±0.4	10	±0.4
R3/8 19	16.662	15.806	14.950	0.7	+1.5 0	8	+0.13 +0.04	5	12	±0.5	10	±0.5
R1/2 14	20.955	19.793	18.631	0.9	+2 0	10	+0.13 +0.04	6	15	±0.5	12.5	±0.5
R3/4 14	26.441	25.279	24.117	0.9	+2 0	14	+0.23 +0.05	7	17	±0.5	14	±0.5
R1 11	33.249	31.770	30.291	1.1	+2.2 0	17	+0.23 +0.05	9			17.5	±0.5
R11/4 11	41.910	40.431	38.952	1.1	+2.2 0	22	+0.275 +0.065	10			19	±0.5
R11/2 11	47.803	46.324	44.845	1.1	+2.2 0	22	+0.275 +0.065	10			19	±0.5

仕様

材質	S10C、S35C、S45C
表面処理	黒染