





Alps socket screws

Hexagon Socket Head Cap Screws

六角穴付きボルト

Unified Inch Series
1936 Series
1960 Series

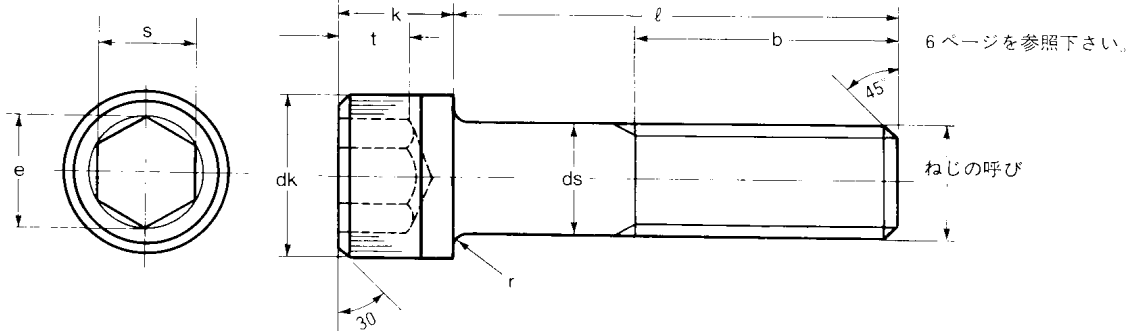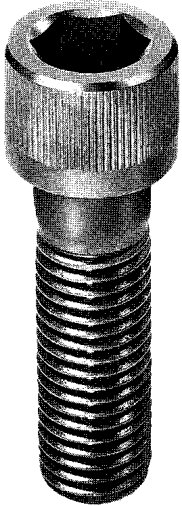

(インチ)

形状及び寸法

ねじの呼び	ねじ山数/インチ		dk 最大		ds 最大	k 最大	s 最大		t 最小	b 参考	r 最大
	UNC	UNF	1936	1960			1936	1960			
	# 0	-	80	-	.096	.060	.060	-	.050	.025	.500
# 1	64	72	-	.118	.073	.073	-	1/16	.031	.625	.007
# 2	56	64	-	.140	.086	.086	-	5/64	.038	.625	.008
# 3	48	56	-	.161	.099	.099	-	5/64	.044	.625	.008
# 4	40	48	.183	.183	.112	.112	5/64	3/32	.051	.750	.009
# 5	40	44	.205	.205	.125	.125	3/32	3/32	.057	.750	.010
# 6	32	40	.226	.226	.138	.138	3/32	7/64	.064	.750	.010
# 8	32	36	.270	.270	.164	.164	1/8	9/64	.077	.875	.012
#10	24	32	.312	.312	.190	.190	5/32	5/32	.090	.875	.014
1/4	20	28	.375	.375	.250	.250	3/16	3/16	.120	1.000	.014
5/16	18	24	.437	.468	.312	.312	7/32	1/4	.051	1.125	.017
3/8	16	24	.562	.562	.375	.375	5/16	5/16	.182	1.250	.020
7/16	14	20	.625	.656	.437	.437	5/16	3/8	.213	1.375	.023
1/2	13	20	.75	.750	.500	.500	3/8	3/8	.245	1.500	.026
5/8	11	18	.875	.937	.625	.625	1/2	1/2	.307	1.750	.033
3/4	10	16	1.000	1.125	.750	.750	9/16	5/8	.307	2.000	.039

仕様

強度区分	12.9	A2-70 ステンレス
材質	SCM 435	XM-7
引張強さ	1220N/mm ² ・124kgf/mm ²	700N/mm ² ・71.4kgf/mm ²
硬さ	HRC39-44	-
ねじ精度	3A	2A
部品等級	A	A
表面処理	黒色酸化被膜+防錆油	光沢処理