




Alps socket screws

Hexagon Socket Head Cap Screws

六角穴付きボルト

Inch Series

■六角穴付きボルトの軸の長さ(ねじ部長さ)

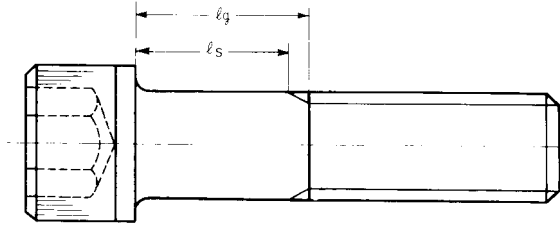

lg: リングゲージをはめて測定した
最大軸長さ。

ls: 最小軸長さ。

適用範囲: UNC, UNF, BSW, BSF
に対して適用する。

(lg, lsの単位mm)

呼び径	# 4 (2.84)		# 5 - 1/8 (3.175)		# 6 (3.50)		# 8 (4.16)		#10 - 3/16 (4.83)		1/4 (6.35)		5/16 (7.94)		3/8 (9.53)		7/16 (11.11)		1/2 (12.7)		5/8 (15.87)		3/4 (19.05)		
	lg	ls	lg	ls	lg	ls	lg	ls	lg	ls	lg	ls	lg	ls	lg	ls	lg	ls	lg	ls	lg	ls	lg	ls	
3/4"																									
1"	6	3	6	3																					
1-1/4	6	3	6	3	12.5	9	9.5	6	9.5	4.5															
1-1/2	19	16	19	16	12.5	9	9.5	6	9.5	4.5	12.5	6.5													
1-3/4	19	16	19	16	25	21.5	22	18.5	22	17	12.5	6.5	15.5	9	12.5	5									
2"	31	28.5	31	28.5	25	21.5	22	18.5	22	17	25	18	15.5	9	12.5	5	15.5	7							
2-1/4	31	28.5	31	28.5	38	34	35	31	35	30	25	18	28	22	25	18	15.5	7	19	9.5					
2-1/2			44	41	38	34	35	31	35	30	38	32	28	22	25	18	28	20	19	9.5		19	8		
2-3/4					50.5	47	47.5	44	47.5	42.5	38	32	41	34.5	38	30.5	28	20	19	9.5	19	8			
3"							47.5	44	47.5	42.5	50.5	44.5	41	34.5	38	30.5	41	32.5	38	28.5	19	8	25	13	
3-1/4							60	56.5	60	55.5	50.5	44.5	53.5	47	50.5	43	41	32.5	38	28.5	38	26.5	25	13	
3-1/2									60	55.5	63.5	57.5	53.5	47	50.5	43	53.5	44.5	38	28.5	38	26.5	25	13	
3-3/4									73	68	63.5	57.5	66.5	60	63.5	56	53.5	44.5	57	47.5	38	26.5	25	13	
4"									73	68	76	70	66.5	60	63.5	56	66.5	58	57	47.5	57	46	50.5	38.5	
4-1/4											76	70	79	72.5	76	68.5	66.5	58	57	47.5	57	46	50.5	38.5	
4-1/2											88.5	83	79	72.5	76	68.5	79	70.5	76	67	57	46	50.5	38.5	
4-3/4											88.5	83	91.5	85	88.5	81	79	70.5	76	67	76	65	50.5	38.5	
5"											101	95.5	91.5	85	88.5	81	91.5	83	76	67	76	65	76	64	
5-1/4													104.5	98	101.5	94	91.5	83	95	85.5	76	65	76	64	
5-1/2													104.5	98	101.5	94	104.5	96	95	85.5	95	84	76	64	
5-3/4													117	110.5	114	106.5	104.5	96	95	85.5	95	84	76	64	
6"													117	110.5	114	106.5	117	108.5	114	105	95	84	101	89	